



SULFUR-BEARING Waste Incineration Systems



COMBUSTION AND ENVIRONMENTAL SOLUTIONS.
PURE AND SIMPLE.™

BURNERS

FLARES

INCINERATORS

PARTS & SERVICE



Representación exclusiva en
España:

Soljet Energía S.A.

Paseo de la Castellana 154, Madrid 28046
www.soljet.com - Teléfono: 91 458 7732

SULFUR-BEARING Waste Incineration Systems



Vertical SRU tail gas incinerator.

COMBUSTION AND ENVIRONMENTAL SOLUTIONS.
PURE AND SIMPLE.™



Economical and Energy Efficient

Thermally treating waste matter is a primary method for disposing hazardous and non-hazardous materials worldwide—it's safe and effective. Zeeco offers a complete line of vapor and liquid incinerators (also known as thermal oxidizers) to dispose of waste streams such as tail gas, acid gas, chlorinated hydrocarbons, and other waste gases and liquids. In addition, multiple waste heat recovery options can make incineration an economical and energy efficient waste disposal process.

SRU tail gas / permeate gas incinerator with hot oil waste heat recovery unit. One of six similar incineration systems supplied by Zeeco.

Custom Engineering and Reliability

Zeeco is a world leader in the development of combustion solutions for the refining, petrochemical, pharmaceutical, and power generation industries. Our staff members have extensive experience in design, fabrication, and operation of sulfur-bearing waste incineration systems. Zeeco also has a proven track record of producing the world's largest and most advanced incinerators for disposal of sulfur-bearing compounds. Our incineration systems are custom engineered to meet our clients' specific needs.

Equipment reliability is essential for profitable plant operations. For this reason, Zeeco chooses quality components and materials for all of our products in order to maximize service life and eliminate unnecessary downtime.



High Destruction Efficiencies

Zeeco achieves high destruction efficiencies (DRE) during the waste incineration process by optimizing the following parameters for each specific process scenario:

- 1. TIME:** maintaining a minimum residence time between 0.7–2.0 seconds.
- 2. TEMPERATURE:** designing the equipment to operate at a temperature that is significantly higher than the autoignition temperature of the sulfur compounds in the waste stream (~700°F or 370°C). Zeeco's sulfur-bearing incineration systems typically operate at temperatures between 1200-1500°F (649-816°C).
- 3. TURBULENCE:** ensuring that waste gas is introduced in a manner that results in a homogenous fully reacted effluent.

Due to the relatively low operating temperature, NO_x formation during this process is limited. Operating temperatures greater than 1450°F (788°C) are often recommended in processes where carbon monoxide emissions are likely to become important. Due to the large amount of heat generated by the incinerator, many Zeeco systems incorporate waste heat recovery equipment to further reduce operating costs by generating steam and/or hot oil required for other plant operations. The hot flue gases can also be used to preheat combustion air and/or waste gas to reduce fuel consumption.

A resulting byproduct of the sulfur oxidation process is sulfur dioxide (SO_2), which exits in equilibrium with a small amount of sulfur trioxide (SO_3). The sulfur trioxide can form sulfuric acid (H_2SO_4) at low temperatures, which can be a significant issue if it is allowed to condense on and corrode the incinerator's outer carbon steel shell. Zeeco minimizes acid corrosion by maintaining the shell temperature above the sulfur dew point temperature.

Many chemical processes produce SO_2/SO_3 (SO_x) levels that are small enough that further flue gas treatment is not necessary. However, if SO_x emissions are greater than local environmental requirements allow, Zeeco can also supply caustic scrubbers to reduce the SO_x emissions to acceptable levels.



SRU tail gas incinerator designed for use in cold temperature climate.



Zeeco incinerator pilots are fully tested and proven to ensure reliable long term operation.



World's largest SRU tail gas incinerator with firetube waste heat boiler and steam drum. One of nine similar systems supplied by Zeeco.

COMBUSTION AND ENVIRONMENTAL SOLUTIONS. PURE AND SIMPLE.™



Sulfur Recovery Process

Sulfur-bearing waste incineration systems typically treat the "tail gases" produced during the sulfur recovery process in a petroleum refinery or other hydrocarbon processing plants. The sulfur recovery process recovers elemental sulfur from the refining processes and the tail gas incinerator serves to thermally treat the residual hazardous sulfur emissions to limits permitted by national and local air quality requirements.


CFD Technology



The chemical and hydrocarbon industry employs Computational Fluid Dynamics (CFD) as a proven modeling tool to aid in equipment design. Zeeco combines advanced CFD technology with our extensive experience in the design, fabrication, and operation of combustion equipment in order to ensure optimal incineration system performance.

Typical Sulfur Recovery Process

In addition to sulfur tail gas incinerators, Zeeco also supplies other equipment used in the sulfur recovery process, including reaction furnaces, inline heaters, reducing gas generators, high intensity burners and waste heat boilers.

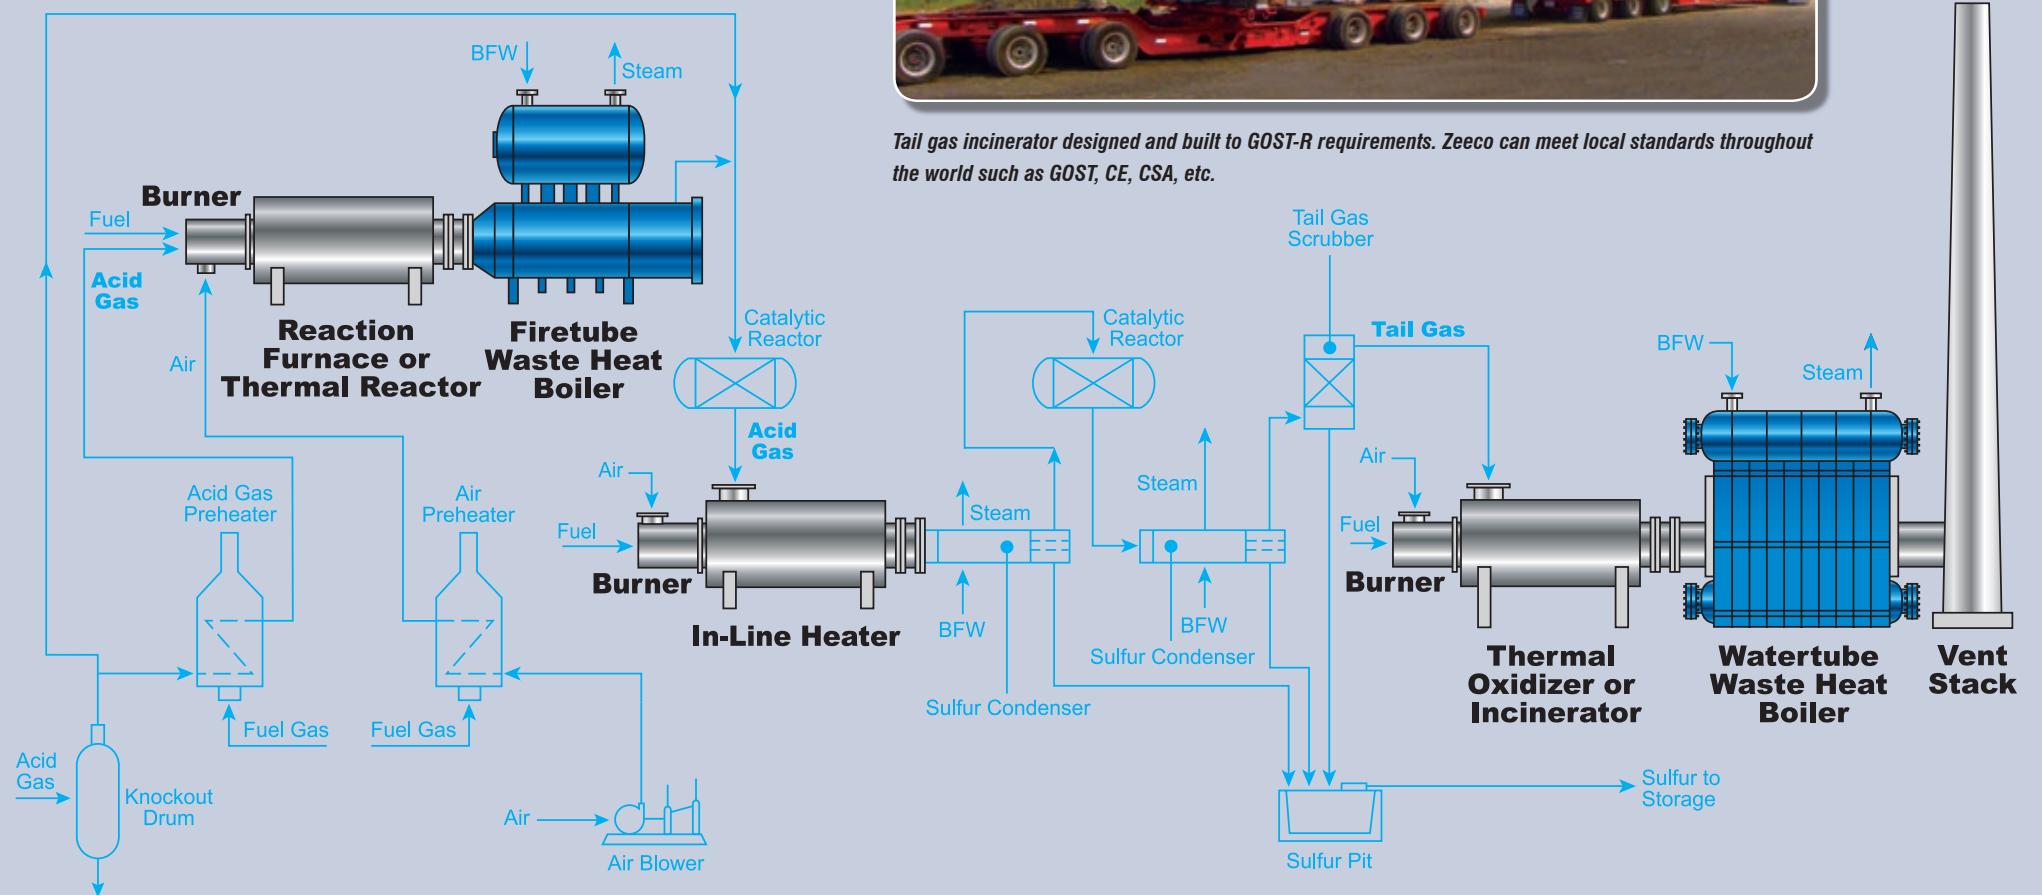

Tail gas incinerator designed and built to GOST-R requirements. Zeeco can meet local standards throughout the world such as GOST, CE, CSA, etc.



Vertical tail gas incinerator with hot oil heater for waste heat recovery purposes.



Vertical tail gas incinerator.

Proven Performance

Zeeco has provided combustion and environmental solutions around the world for more than 30 years. Let us put our experience to work for you. Contact us today for more information on Zeeco's full line of incineration products, services, and replacement parts.



BURNERS



FLARES



INCINERATORS



PARTS & SERVICE

**COMBUSTION AND ENVIRONMENTAL SOLUTIONS.
PURE AND SIMPLE.SM**



Zeeco Corporate Headquarters
22151 East 91st Street
Broken Arrow, Oklahoma 74014 USA
Phone: +1.918.258.8551 Fax: +1.918.251.5519
E-mail: sales@zeeco.com

www.zeeco.com



Representación exclusiva en España:



Soljet Energía S.A.
Paseo de la Castellana 154, Madrid 28046
www.soljet.com – Teléfono: 91 458 7732

CERTIFICATIONS APPLY TO ZEECO HEADQUARTERS.

